

**PANEL SPECIFICATION
(B.S. STANDARDS)**

| | |
|-------------------|--|
| SIZE (N.T.S) | 400x500x210 mm (WxHxD) |
| DEVICES | 1NO. 150VA TRANSFORMER 1NO. C2 MCB 1NO. C4 MCB |
| COLOUR | RAL 7035 |
| HINGE | LEFT |
| 230V POWER CABLES | TOP ENTRY (RHS) |
| 24V POWER CABLES | TOP ENTRY (LHS) |

PANEL FEATURES

- KEY LOCKS ON DOOR.
- REMOVABLE GLAND PLATE FOR CABLE ENTRY.
- CABLE NUMBERING.
- 1NO. POWER SUPPLY HEALTHY LED (GREEN).
- 1NO. 24V DAMPER CIRCUIT POWER LED (GREEN).
- 10NO. 24V TERMINALS WITH 5A FUSES.

NOTES

- PANEL MUST BE IN A VENTILATED ENVIRONMENT.
- CODE: EUROPEAN CABLE COLOUR L/BROWN N/BLUE.
- PLEASE REFER TO PANEL INSTALLATION INSTRUCTIONS AND DATASHEET.

| REV | DATE | DESCRIPTION |
|-----|----------|-----------------|
| 8 | 13/02/26 | FOR INFORMATION |
| | | |
| | | |

| | | |
|-----------|-------------|--------------|
| DRAWN BY: | CHECKED BY: | APPROVED BY: |
| DMC | DD | |



ACTIONPAC PSP-1

TITLE:
ACTIONPAC PSP-1 ENCLOSURE LAYOUT

| | |
|--------------------|--------|
| DRAWING REF: | PAGE: |
| Actionpac PSP-1_01 | 1 of 2 |


Outgoing 24V AC
Terminals to Dampers

Outgoing 0V
Terminals to Dampers

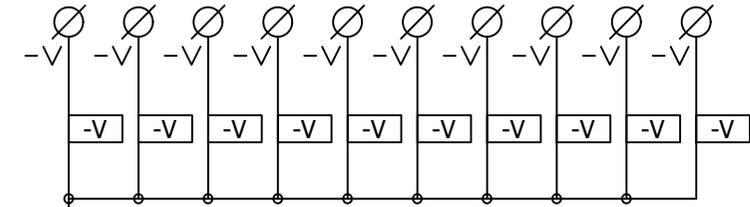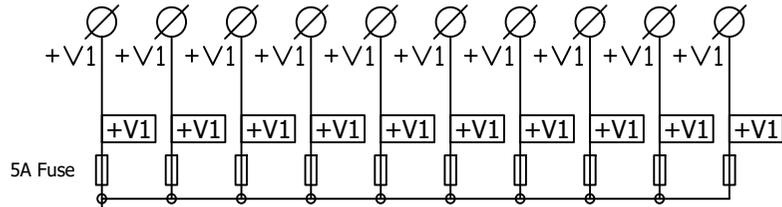

MCB2 C6

+V1





24V Circuit 1
LED (G)

+V


-V

Power Supply
Healthy LED (G)


MCB1 C2



L1



230V Incoming power supply



| | |
|--|-----------------|
| ACTIONPAC PSP-1 | |
| TITLE: ACTIONPAC PSP-1 POWER WIRING | |
| DRAWING REF: Actionpac PSP-1_02 | PAGE: 2 of 2 |
| | |